


PCE data sheet

article#	4455-2fe
article description	CEE-flanged socket sloping (114x114) 125A 5p 2h IP67 Pilot POWER TWIST
description long	CEE-flanged socket sloping (114x114) 125A 5p 2h IP67 Pilot POWER TWIST housing material: PA6 rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 2h rated voltage/frequency: >50V~ / 300-500Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 114x114 mm / 90x90 mm with pilot contact sleeve IP protection class: IP66/IP67
country of origin	AT
customs number	85366990

ETIM 7.0	EC001317
IEC-amperage	125 A
Voltage acc. EN 60309-2	50-500 V (>300-500 Hz) green
Number of poles	5
Clock hour position	2 h
Identification colour	Green
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	114 mm
Drill hole distance vertical	90 mm
Flange size horizontal	114 mm
Drill hole distance horizontal	90 mm

wire flexible	16-50 mm ²
wire solid	16-70 mm ²
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm

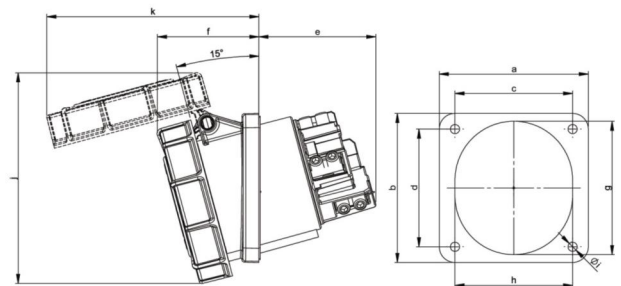

www.manufacturer-safety.info