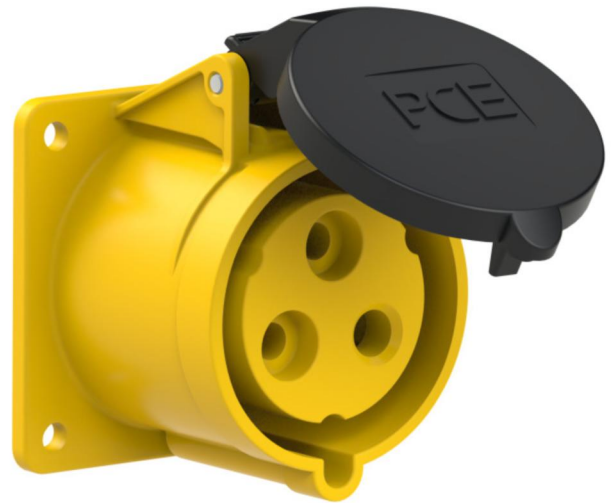


PCE data sheet

article#	3239-4f7v
article description	CEE-receptacle flange 75x75 straight 30A 2P3W 4h IP44 UL
description long	CEE-receptacle flange 75x75 straight 30A2P3W 4h IP44 UL (PCE330R4Sv) housing material: PA6 rated current: 32A/30A number of poles: 2P3W (3p) clock position: 4h rated voltage: 120Vac contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 75x75mm / 60x60mm IP protection class: IP44
country of origin	AT
customs number	85366990

ETIM 7.0	EC001317
IEC-amperage	32 A
Amperage acc. UL/CSA (for UL-version)	30 A
Number of poles	3
Clock hour position	4 h
Identification colour	Yellow
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface finish contacts	Nickel-plated
Flange size vertical	75 mm
Drill hole distance vertical	60 mm
Flange size horizontal	75 mm
Drill hole distance horizontal	60 mm

wire flexible	2,5-6 mm ²
wire solid	2,5-10 mm ²
contact screws	110 Ncm
dismantling length	50 mm
stripping length	12-14 mm


www.manufacturer-safety.info