


PCE data sheet

article#	382-2f8v
article description	CEE-flanged socket straight 60x70mm 16A 2p 24/42VAC 300Hz IP44/IP54 TWIST
description long	CEE-flanged socket straight 60x70mm 16A 2p 24/42VAC 300Hz IP44/IP54 TWIST housing material: PA6 rated current: 16A number of poles: 2 (2P) clock-position: 2h rated voltage/frequency: 24/42V~ / 300Hz contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 60x70 mm / 47x53 mm IP protection class: IP44/IP54
country of origin	AT
customs number	85366990
packaging quantity	10
minimum order quantity	10

ETIM 7.0	EC001317
IEC-amperage	16 A
Voltage acc. EN 60309-2	20-25 V / 40-50 V (300 Hz) green
Number of poles	2
Clock hour position	2 h
Identification colour	Green
Degree of protection (IP)	IP54
Connection system	Schraubklemme
Angle of plug	Straight
Material	Plastic
Flange size vertical	70 mm
Drill hole distance vertical	53 mm
Flange size horizontal	60 mm
Drill hole distance horizontal	47 mm

wire flexible	1-10 mm ²
wire solid	1,5-10 mm ²
contact screws	160 Ncm
dismantling length	70 mm
stripping length	14-16 mm

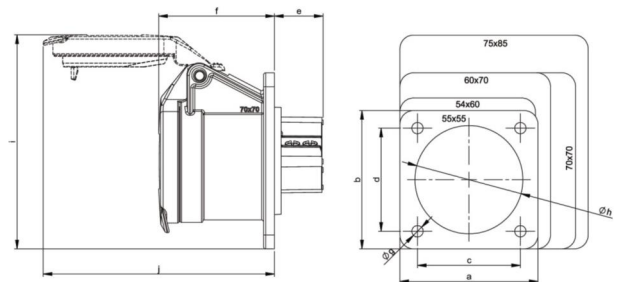

www.manufacturer-safety.info