


PCE data sheet

| | |
|------------------------|---|
| article# | 392-11f5v |
| article description | CEE-flanged socket straight 55x55mm 32A 2p 24/42VAC >400-500Hz IP44/IP54 TWIST |
| description long | CEE-flanged socket straight 55x55mm 32A 2p 24/42VAC >400-500Hz IP44/IP54 TWIST housing material: PA6 rated current: 32A number of poles: 2 (2P) clock-position: 11h rated voltage/frequency: 24/42V~ / >400-500Hz contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 55x55 mm / 45x45 mm IP protection class: IP44/IP54 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|--------------------------------|---------------------------------------|
| ETIM 7.0 | EC001317 |
| IEC-amperage | 32 A |
| Voltage acc. EN 60309-2 | 20-25 V / 40-50 V (>400-500 Hz) green |
| Number of poles | 2 |
| Clock hour position | 11 h |
| Identification colour | Green |
| Degree of protection (IP) | IP54 |
| Connection system | Schraubklemme |
| Angle of plug | Straight |
| Material | Plastic |
| Flange size vertical | 55 mm |
| Drill hole distance vertical | 45 mm |
| Flange size horizontal | 55 mm |
| Drill hole distance horizontal | 45 mm |

| | |
|--------------------|------------------------|
| wire flexible | 1-10 mm ² |
| wire solid | 1,5-10 mm ² |
| contact screws | 160 Ncm |
| dismantling length | 70 mm |
| stripping length | 14-16 mm |

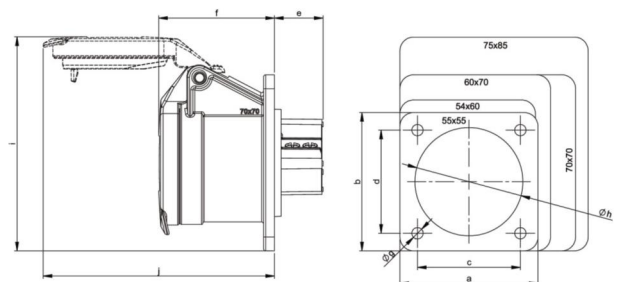

www.manufacturer-safety.info