


## PCE data sheet

|                     |   |
|---------------------|---|
| article#            | <b>4149-9f8</b>   |
| article description | <b>CEE-receptacle flange 80x97 angled 20A 3P4W 9h IP44 UL</b>   |
| description long    | CEE-receptacle flange 80x97 angled 20A 3P4W 9h IP44 UL (PCE420RA9S)<br>housing material: PA6<br>rated current: 16A/20A<br>number of poles: 3P4W (4p)<br>clock position: 9h<br>rated voltage: 250Vac<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 80x97mm / 60x73mm<br>IP protection class: IP44 |
| country of origin   | AT  |
| customs number      | 85366990  |

|                                       |                  |
|---------------------------------------|------------------|
| ETIM 7.0                              | EC001317         |
| IEC-amperage                          | 16 A             |
| Amperage acc. UL/CSA (for UL-version) | 20 A             |
| Number of poles                       | 4                |
| Clock hour position                   | 9 h              |
| Identification colour                 | Blue             |
| Degree of protection (IP)             | IP44             |
| Connection system                     | Screwed terminal |
| Angle of plug                         | Angled           |
| Material                              | Plastic          |
| Contact material                      | CuZn             |
| Surface finish contacts               | Untreated        |
| Flange size vertical                  | 97 mm            |
| Drill hole distance vertical          | 73 mm            |
| Flange size horizontal                | 80 mm            |
| Drill hole distance horizontal        | 60 mm            |

|                    |                       |
|--------------------|-----------------------|
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| wire solid         | 1-4 mm <sup>2</sup>   |
| contact screws     | 100 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

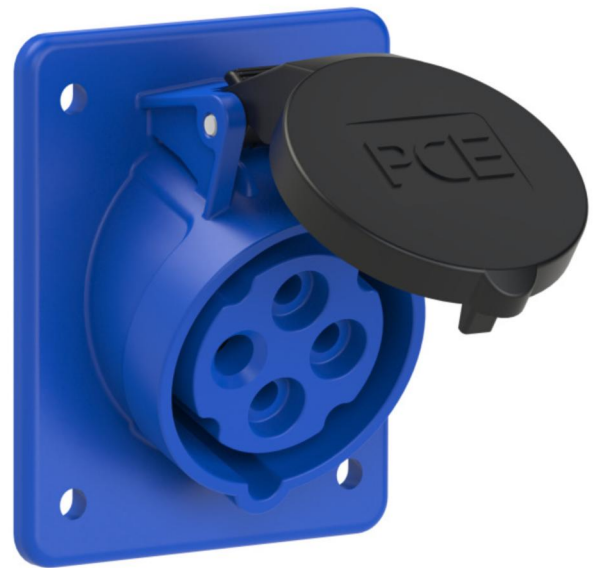

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)