


# PCE data sheet

article#	<b>9350001-p</b>
article description	<b>XREEL310 4xSSD54+L 40m3G2.5H07 PS30 K2</b>
description long	<p>Cable Reel XREEL310            Reel (black) with central, internal locking mechanism            Protected connecting area            Solid carrying rack (black) with ergonomic handle            Central plate with 4 pcs safety machine sockets            national version with self-closing hinged lids and sealing edge (105-0bsw)            Rated operating voltage: 250V            Rated current: 16A            Protection rating: IP54            1 pcs power supply light            40m Black cable H07RN-F 3G2.5mm2            TopTaurus2 safety plug 16A 2p+PE 2SL 250V IP54 (05721-sr)            Cable reel installed ready for use            complies with RoHS directive 2011/65/EU            low voltage directive NSpRI 2014/35/EU            UV stability according ISO 4892-2            acc standard IEC/EN 61242            Protection rating complete system: IP54            Conform with BGI608 K2</p>
GTIN (EAN)	9003399328510
country of origin	PL
customs number	85444290
net weight	10.600 kg
packaging quantity	1
minimum order quantity	1

ETIM 8.0	EC000003
Number of poles	3
Rated voltage	230 V
Rated current	16 A
Rated fault current	0.03 A
Mounting method	Other
Leakage current type	Other
Frequency	50 Hz
Degree of protection (IP)	IP54

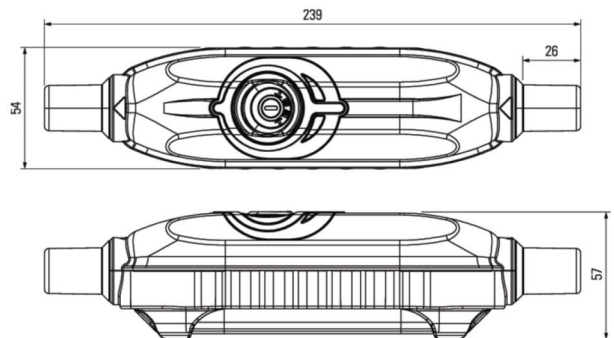

<https://www.pcelectric.at/shop/en/?func=detail&artnr=9350001-p>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)